

ShowerCoil™

Portable Water Heater and Shower

ShowerCoil™ Portable Water Heater and Shower

The ShowerCoil water heating system delivers temperature-controlled hot water ready in minutes so you'll never need to go without a hot shower!

Simply fill and hang up one bag with water, interconnect and apply heat to the coil with either a camp fire or stove.

SureTEMP™ Thermostatic Temperature Control gives you control and flexibility, allowing you to preset the temperature you need. In 10-15 minutes you'll be ready to shower with 4 gallons of hot water at just the right temperature.

One filled shower runs for 8-9 minutes at full flow and can last up to four showers when water is conserved by using the integral flow control valve on the shower head attachment.

The system stows away compactly and weighs less than two pounds. No batteries or pumps needed; just add water and heat. Gravity does the rest.


Efficient, simple and lightweight, the ShowerCoil system provides a hot shower just about anywhere!

System now includes new and improved 15L Universal Bags, lined with BPA-free food-grade polyurethane. The large capacity bags may alternately be used to dispense drinking water for larger groups or base camping. Also ideal for use as a large capacity reservoir* for third party inline gravity water filters. (*1690 Hydration Kit required)*


Features

- Accurate** Thermostatically controls water temperature for comfort and convenience - Adjustable from 85°F to 115°F.
- Fast** Heats 4 gallons (15 L) of water in 10 - 15 minutes.
- Lightweight** Complete system weighs less than 2 pounds.
- Versatile** Operates with either a camp fire or a stove.
- Simple & Dependable** No batteries or pumps needed. Just add water and heat. Gravity does the rest.

See videos at www.youtube.com/boundarytec

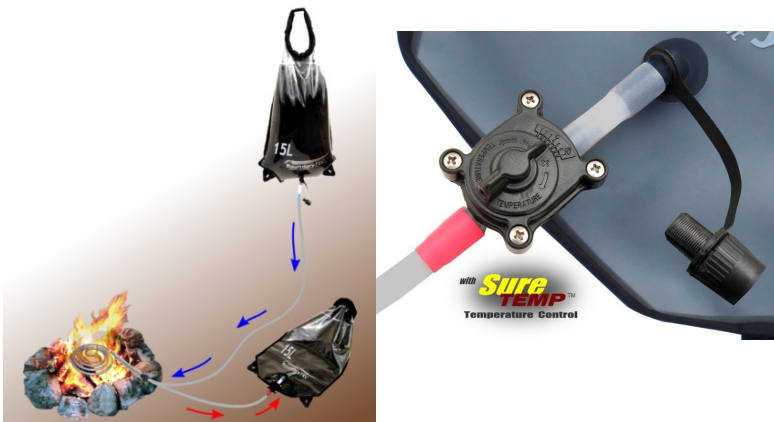

Datasheet MODEL 1530A

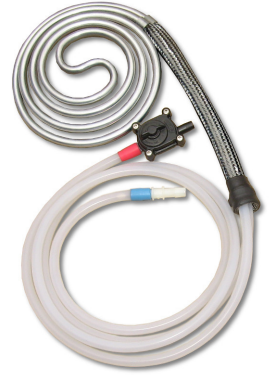

Specifications

Weights	
Heating Coil Assembly	15 oz / 425 g
15L Universal Bag (ea)	7.0 oz / 200 g
Dry Weight (Total System)	30.5 oz / 865 g
Dimensions	
Heating Coil Assembly (packed)	8 in. Dia. x 2 in. H / 20 cm Dia. x 5 cm H
Inlet Tube Length	76 in. / 1.9 m
Outlet Tube Length	32 in. / 0.8m
Water Bag	14in. x 28 in. / 36 x 90 cm
Shower Capacity	4 gallons (15 liters)
Temperature Selector Range	85°F – 115°F (30 C – 46 C)
Shower Run Time (4 gal.)	8-9 minutes
For Use with Stove Type	Single Burner Backpacking Stove (not included) 10,000-15,000 BTUH Output
Estimated heating time to heat 4 gal. of water from 60F to 100F	Camp Fire with 60% flame coverage: 12 min. Stove with 10,000 btuh burn rate, minimal wind: 15 min. * Heating time may exceed 15 min. for extreme conditions. * Heated water not for consumption.
	<ul style="list-style-type: none"> • Heated water not for consumption. • For outdoor use only.
Included	(1) Heating Coil Assembly (2) 15L Universal Bags (1571) (1) Showerhead Attachment (1) Heat Deflector (1) Y Stand (1) Nylon Drawstring Storage Bag (1) Manual
Warranty	1 Year Limited Warranty
Country of Origin	Assembled in USA with Imported and US parts

Patent Pending

ShowerCoil™

Portable Water Heater and Shower

Model: 1530A
Includes:

Sure TEMP™



Thermostat Valve with Adjustable Temperature
 Automatically varies the flow of water so that just the right amount of heat is absorbed into the flowing water, producing the preset water temperature! - Adjustable from 85°F to 115°F.

Heating Coil
 Formed aluminum heat exchanger maximizes heat transfer while keeping weight to a minimum.

Stainless Steel Heat Deflector
 Improves heating efficiency when heating with a stove.

Insulated Sheath
 A stainless steel braided sleeve overlays a layer of high temperature insulation allowing flexibility for compact storage while protecting the rubber tubes from heat.

Storage Bag
 Ripstop nylon bag with drawstring closure compactly stores heating coil assembly and accessories.



Shower Head Assembly
 Detachable shower head provides a comfortable spray pattern. Easy-to-use pinch type valve with variable flow control for convenient one-handed operation.

Y-Stand
 Embeds into ground for tube support when heating with a stove.

Silicone Rubber Tubing
 Provides optimum flexibility, as well as high temperature resistance.

(2) 15L Universal Bags

- * Easy-to-fill roll-top bags seal in vapor and slow cooling, keeping water hot for up to an hour.
- * Waterproof RF welded construction using durable Nylon & TPU materials.
- * Purge valve can be used for decompression when used as a dry bag or as a utility water dispensing valve.
- * Lined with BPA free food grade polyurethane - Safe for storing drinking water as an alternate use.



Stove not included

Heating coil shown with stove.



The system includes (2) 15L Universal Bags which can also be used as a solar shower, drinking water reservoir, or dry bag.

DOC: 100-178A